


PRESS 316L Threaded adaptor (MxF)

Family: **PR14MF** · 32 variants



Product image

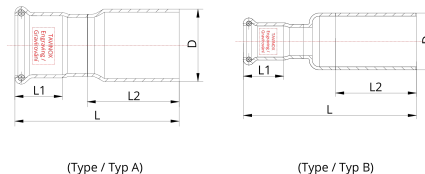

Technical drawing

Product description

The TAVINOX PRESS reducer (MxF) is a stainless steel spigot-end fitting with one press end. Using the TAVINOX PRESS system, you can install pipework quickly, easily and cleanly. TAVINOX PRESS provides a complete pipework system suitable for every conceivable application.

- ✓ Includes a blue unpressed-joint indicator.
- ✓ Detection of unpressed joints via the Leak Detect system.
- ✓ The QR code on the fitting carries all the technical information.

Dimension table

Code	Dimension	EAN	L	L1	L2	Bag	Box
PR14MF.1815	18 x 15 mm	08596683001592	67.5	20	38	10	250
PR14MF.2215	22 x 15 mm	08596683001622	67.5	20	38	10	120
PR14MF.2218	22 x 18 mm	08596683001653	68.5	20	37	10	120
PR14MF.2815	28 x 15 mm	08596683001684	81.5	20	52	5	100
PR14MF.2818	28 x 18 mm	08596683001714	78.5	20	47	5	100
PR14MF.2822 *	28 x 22 mm	08596683001745	78.5	20.5	47	5	100
PR14MF.3515	35 x 15 mm	08596683001776	85.5	20	56	5	50
PR14MF.3518	35 x 18 mm	08596683001806	87.5	20	56	5	50
PR14MF.3522 *	35 x 22 mm	08596683001837	81.5	20.5	50	5	60
PR14MF.3528 *	35 x 28 mm	08596683001868	79.5	22.5	44.5	5	60
PR14MF.4215	42 x 15 mm	08596683001899	91.5	20	62	1	30
PR14MF.4218	42 x 18 mm	08596683001929	93.5	20	62	1	30
PR14MF.4222 *	42 x 22 mm	08596683001950	93.5	20.5	62	1	30
PR14MF.4228 *	42 x 28 mm	08596683001981	99.5	22.5	64.5	1	30
PR14MF.4235 *	42 x 35 mm	08596683002018	94.5	26	54	1	30
PR14MF.5415	54 x 15 mm	08596683002049	104.5	20	75	1	20
PR14MF.5418	54 x 18 mm	08596683002070	106.5	20	75	1	20
PR14MF.5422 *	54 x 22 mm	08596683002100	105.5	20.5	74	1	20
PR14MF.5428 *	54 x 28 mm	08596683002131	107.5	22.5	72.5	1	20
PR14MF.5435 *	54 x 35 mm	08596683002162	106.5	26	69	1	20
PR14MF.5442 *	54 x 42 mm	08596683002193	102.5	30	63.5	1	20

Code	Dimension	EAN	L	L1	L2	Bag	Box
PR14MF.7622 *	76,1 x 22 mm	08596683002223	135.5	20.5	70	1	12
PR14MF.7628 *	76,1 x 28 mm	08596683002254	139	22.5	70	1	12
PR14MF.7635 *	76,1 x 35 mm	08596683002285	141.5	26	70	1	12
PR14MF.7642 *	76,1 x 42 mm	08596683002315	139	30	70	1	12
PR14MF.7654 *	76,1 x 54 mm	08596683002346	145.5	34.5	70	1	12
PR14MF.8842 *	88,9 x 42 mm	08596683002377	152	30	80	1	6
PR14MF.8854 *	88,9 x 54 mm	08596683002407	157.5	34.5	80	1	6
PR14MF.8876 *	88,9 x 76,1 mm	08596683002438	176.5	51.5	80	1	6
PR14MF.10854 *	108 x 54 mm	08596683002469	180.5	34.5	95	1	2
PR14MF.10876 *	108 x 76,1 mm	08596683002490	192.5	51.5	95	1	2
PR14MF.10888 *	108 x 88,9 mm	08596683002520	211	58	95	1	2

* Fire certification VdS / PAVUS

Technical data

Material	Stainless steel AISI 316L (1.4404)
Seal type	EPDM O-ring
Certification	CCZ, ITC, DVGW, EPD, ISO